





Installation Process

Electric tail gate lift system

TL105-5889

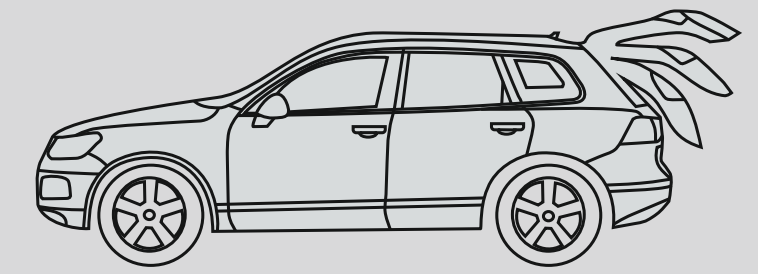

NO:5658893010000


NOTE

Installation Precautions of Electric Tail gate Lifts

- 1.To ensure safety and normal usage of our products, please let the professional sales staff to install; to avoid damaging the machine or causing accidents, please do not dismantle the products.
- 2.To start the engine before installation, check the car dashboard display function, whether the buttons operate normally, whether there is any scratches on car interior and surface. If any problems, reflect to the customer immediately.
- 3.Check whether the tailgate can normally open and close or not, check if there is any problem with the lights.
- 4.Turn off the engine, prepare tools.
- 5.For installation personnel: please remove metal objects and any other hard objects to prevent car damage during the installation process.
- 6.Remove automotive components and place them carefully to avoid scratching the dashboard; wiring debris need to be tidied up in time, do not leave them in the car; Joints must be well insulated to prevent short circuits.
- 7.According to our wiring way, to avoid affect the car moving parts, such as steering column, the accelerator and brake pedals, etc., each harness should be fixed after wiring, to avoid getting loose.
- 8.Connect each harness according to our wiring way(pay attention to the position of ground wire).
- 9.Do not change the wires or accessories with the power on.

▲After installation, close the tail gate manually, so that the system can initialize.


Wires Definition

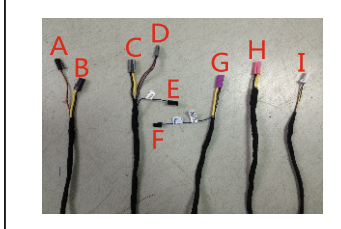


- A.Latch-driving box port②
- B.Latch-driving box port③
- C.Connect to the control box port③
- D.Connect to the control box port⑤
- E.Joint with power wire F
- F.Joint with power wire E
- G.Connect to the control box port⑥
- H.Joint with power picker B
- I.As the original car has the front button,it's no need to insert this plug




- A.Plug of buzzer
- B.Joint with the plug of rear button
- C.Connect to the control box port③

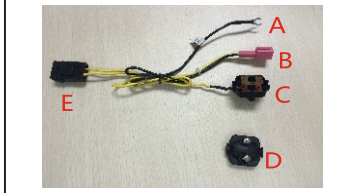


- A.Connect to the ground wire
- B.Joint with power wire H
- C.Clip of power-picking
- D.The upper cover of power picker
- E.Fuse

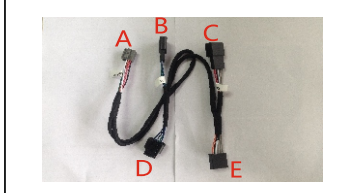

- A.Connect to the control box port①
- B.Tailgate button(in)
- C.Lock control(in)
- D.Tailgate button(out)
- E.Lock control(out)

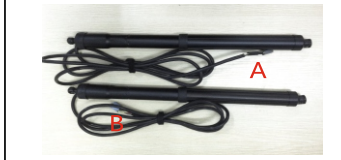


- A.Connect to the control box port②
- B.Connect to the control box port⑨⑩

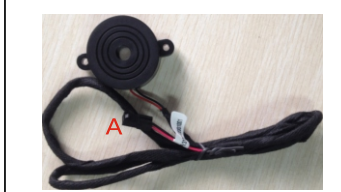

- A.Joint with rear button transfer wire D

▲All above is subject to change without prior notice. All rights reserved.

Wires Definition

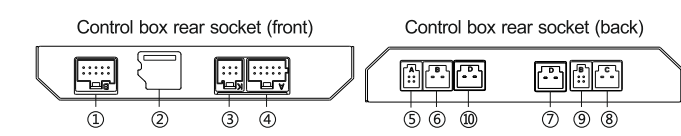

▲All above is subject to change without prior notice. All rights reserved.

Installation Steps

1. Original tailgate of Land rover Evoque.
- 2.Original button in dashboard.
- 3.Pry the plaque of tailgate.
4. Pull out the original plug of lock part.
- 5.Joint our wire with the lock control wire.
- 6.Pry the plaque of tailgate button.
- 7.Pull out the original plug of button.
- 8.Joint our wire with original tailgate button.

Installation Steps

9. Dismantle the original gas springs(Both sides are the same).
- 10.Install our poles,the pole wire goes through the passing-line hole on the tailgate.
- 11.Dismantle the original lock bolt.
- 12.Install our lock bolt.
- 13.Layout the power wire as shown in the picture,the hole which to go through the wire is above the tailgate ball stud.
- 14.Fix the control box on the tailgate.
- 15.Put the latch-driving box under the left plaque.
- 16.Position of picking power(Pick power as shown in the right corner).

Installation Steps

- 17.Pry the samll plaque of original tailgate.
18. Install our rear button.

▲Original remote control operation mode:Long-press the trunk button.